



actual size

# SMU2 · AEC-Q200

2 Pad Version · 11.5 x 4.8 mm

- AEC-Q200 qualified
- recommended for automotive applications
- reflow soldering temperature: 260 °C max.
- package height 3.0 mm max.



## General Data

type	SMU2	
frequency range	7.680 ~ 33.0 MHz	(fund. AT-cut)
	27.0 ~ 60.0 MHz	(3rd OT AT-cut)
frequency tolerance at 25 °C	± 20 ppm / ± 30 ppm / ± 50 ppm	
load capacitance $C_L$	12 pF ~ 32 pF or series	
shunt capacitance $C_0$	< 5 pF	
storage temperature	-40 °C ~ +125 °C	
shock resistance	> 100 g	(half sine pulse, 6.0 ms)
drive level max.	300 µW	(100 µW recommended)
aging	< ± 5 ppm first year	

## ESR (series resistance Rs)

frequency in MHz	vibration mode	ESR max. in Ω	ESR typ. in Ω
8.0 ~ 9.999	fund.-AT	50	25
10.0 ~ 13.999	fund.-AT	35	15
14.0 ~ 33.000	fund.-AT	30	10
27.0 ~ 60.000	3rd OT-AT	100	60

## Frequency Stability vs. Temperature

		± 30 ppm	± 50 ppm	± 100 ppm	± 150 ppm
-20 °C ~ +70 °C	STD.	○	●		
-40 °C ~ +85 °C	T1	○	○	●	
-40 °C ~ +105 °C	T2		○	○	
-40 °C ~ +125 °C	T3				○


● standard  
○ available

## Marking

frequency with load capacitance code  
company code / date code / internal code

	Jan.	Febr.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
2008	n	p	q	r	s	t	u	v	w	x	y	z
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011	a	b	c	d	e	f	g	h	i	k	l	m

## Dimensions

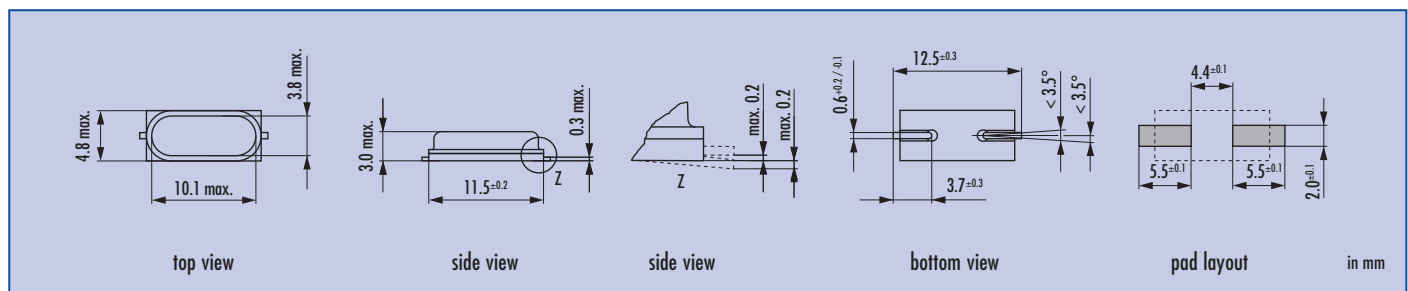

## Order Information

Q	frequency	type	load capacitance	stability at 25 °C	stability vs. temp. range	option
Quartz	7.680 ~ 60.0 MHz	SMU2	12 pF ~ 32 pF S for series	20 ± 20 ppm 30 ± 30 ppm 50 ± 50 ppm	30 ± 30 ppm 50 ± 50 ppm 100 ± 100 ppm 150 ± 150 ppm	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C FU = for fundamental frequencies ≥ 20 MHz 30T = 3rd overtone AEC = AEC-Q200 qualified

Example: Q 25.0-SMU2-30-30/50-AEC-FU (Suffix LF = RoHS compliant / Pb free pins or pads)